

AWNING WINDOW

BAL C40 SERIES - 90mm FRAME



Rylock's BAL C40 Awning Windows have been tested & certified by CSIRO to comply with the requirements of BAL C40. Available only with Rylock BAL C40 Double Glazing, these awning windows include specific componentry to pass the rigours of the exacting test regime



To ensure a tight seal when closed, two separate mechanical latches clamp the sash tightly against the outer frame. The dual seals surrounding the perimeter of the sash are then able to effectively exclude wind & water.




The operator handle folds neatly away from window dressings, giving a clean internal appearance. The handle & latches are available in black, white or silver. Screens - fitted with stainless steel mesh - are standard fitment on all sashes to protect from any ember attacks

Outer frame & sash corners are mitred, enhancing the clean appearance of the window. The substantial frame couples neatly with other BAL C40 windows & doors. Maximum sash sizes are typically **2400mm high by 900mm wide, or 900mm high by 2400mm wide**

AWNING WINDOW



BAL C40 SERIES - 90mm FRAME

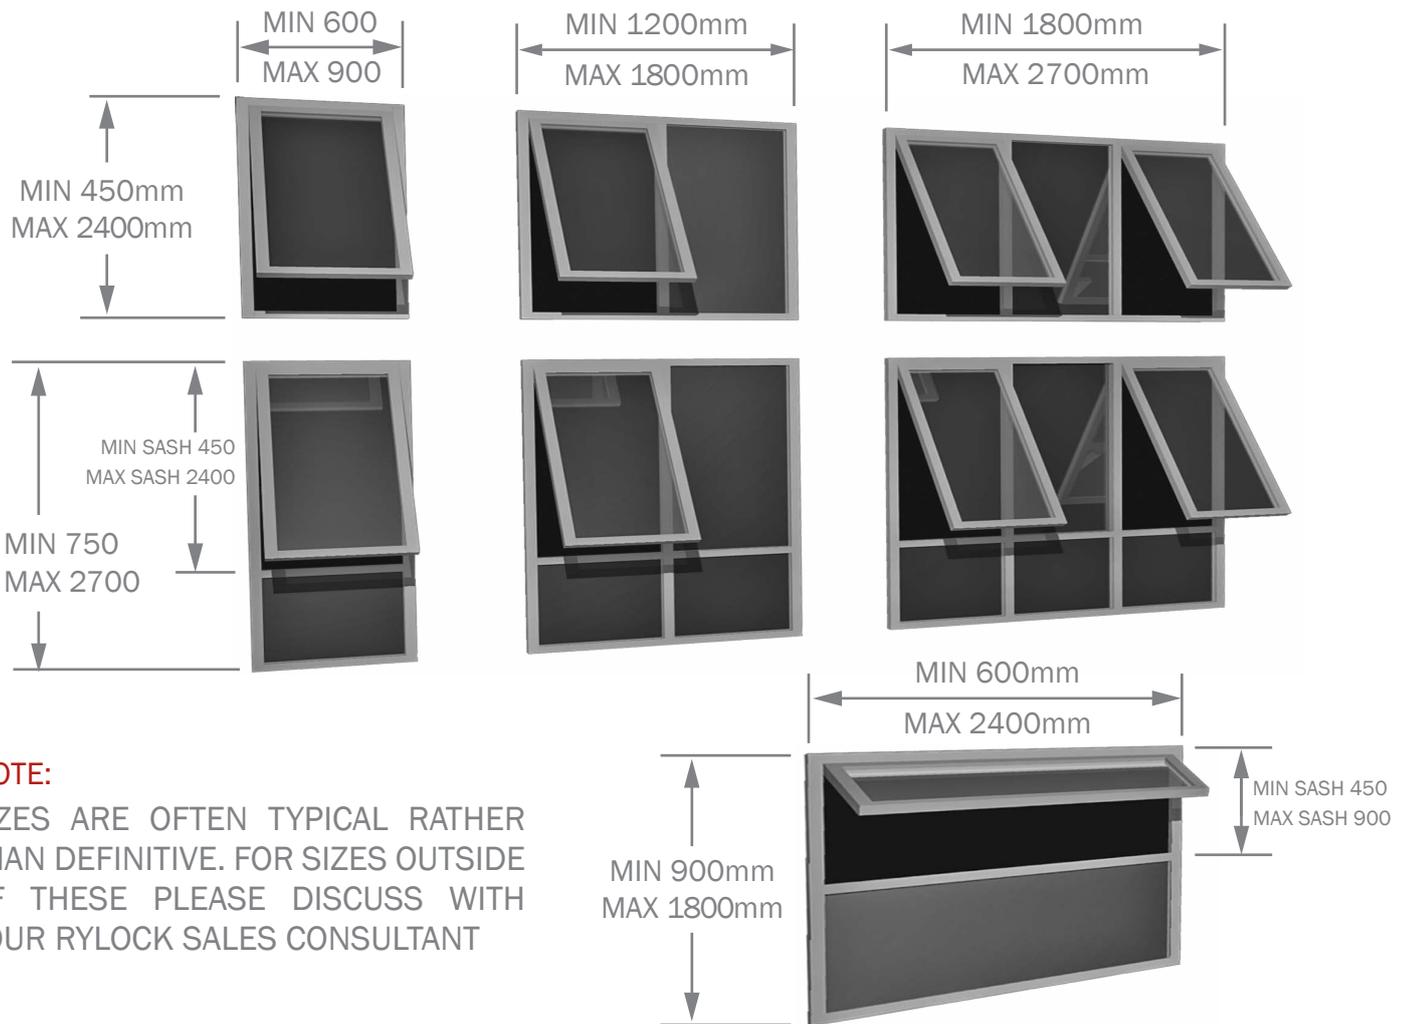

NOTE:

SIZES ARE OFTEN TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

NO INDIVIDUAL GLASS PANEL MAY EXCEED 2.4 sq. m IN AREA & 3000mm IN HEIGHT

Sizing

Window style & opening detail should be considered as viewed externally
Sizes indicated are the overall window size. Reveal is inline with outer frame dimension
For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating, Rylock 'BAL C40 double glazing' only

Certification

Certification for BAL C40 (from CSIRO), in addition to WERS and other performance data are available on request

Specify

Frame colour, configuration (no raked units), height, width & overall depth, reveal type (primed hardwood, raw hardwood, or set up for plaster reveals)

Optional: operator/latch colour, restricted opening, external frame infill, reveal equaliser, sill flap, glass type

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N1' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites in suburban areas. In addition, the location has a Terrain Category of 3, is Topographic Class 1 or 2 and assumes the building will be surrounded by others of similar size.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.